

MODU-DECK
MODULAR AXLE-WEIGH SCALES

ACTIVE
SCALE
MANUFACTURING INC


AXLE-WEIGH
VEHICLE SCALES



MODU-DECK MODULAR AXLE-WEIGH SCALES

Load Cell Assembly

The heart of any weighing device is the load sensing element. The Modu-Deck parallel link suspension and rocker fulcrum load cell provide a unique and vastly superior load sensing system. The double link 360° rotation suspension eliminates off-centre side load weighing errors created by thermal expansion of the weighbridge and accelerating or braking vehicles. The link suspension promotes return to zero, linearity, back weighing and enhances overall accuracy.

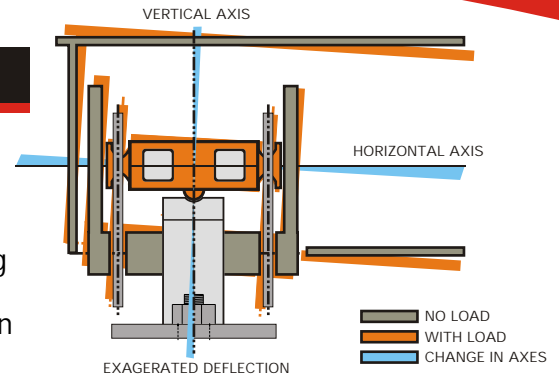

The rocker fulcrum load cell is the only load cell which allows the weighbridge to determine the loading axis of the load cell. Both axes remain constant to one another in both the unloaded, and fully loaded position when deflection in the weighbridge occurs. This unique feature eliminates the main source of weighing errors for which most other systems do not adequately compensate.

The link and rocker fulcrum system is the most forgiving and quickest system to install, as it is simple to align and shim. Grouting is not required, further speeding up the installation.

Ease of installation, ease of maintenance and sustained accuracy are trademarks of the system, which has proven itself in thousands of installations.

Accessories

A complete line of accessories is available from digital weight indicators, printers and remote displays to bar code systems, computerized scale house ticketing systems and unattended weigh stations.

Weigh-Deck Options

- Pit or Pitless
- 8, 10, or 12mm Steel Deck
- Tire Guidrails
- Side Skirting / T Belting
- Surge Protection
- Extended Warranties

Sizes and Capacities

- Widths
Standard module width is 10', available in widths up to 12'. Custom widths to 14'.
- Lengths
Standard module lengths are 10', 12', AND 15'.
- Capacities
Standard scale capacities are from 40 tonnes to 100 tonnes.

Head Office & Plant

P. O. 2145, 6 York Road
Brantford, Ont., N3T 5Y6
Email: info@activescale.com

Toll Free: 1-866-284-2223
Fax: 519-756-0267
24 Hour Service: 1-800-850-8770

Products are available through Active Scale Sales Offices, or through dealers located across Canada and the United States
Specifications are subject to changes without prior notice

1 866-284-2223 • ACTIVESCALE.COM